


90° PVC ANGLE STOCK EXTRUSIONS

Barbour Plastics Rigid Vinyl is a premium grade, thermoplastic material that exhibits excellent impact strength, UV resistance and is virtually maintenance free. It can be cut or drilled using most common woodworking tools.

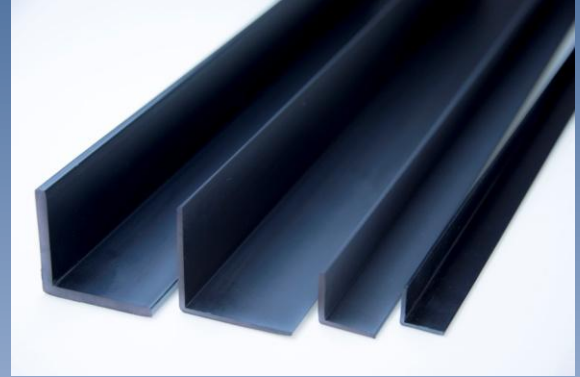

Great for various applications:

- Protective corner guards
- Hold down brackets
- Guide tracks
- Wall joiners
- Edge trim

- Available from stock in black color
- Custom colors available – MOQ apply
- One box minimum order

Thermoplastic PVC Physical Properties

•Specific Gravity	1.40	ASTM D-792	✓ Durable
•Hardness – Shore D +/- 5	80	ASTM D-2240	✓ UV Resistant
•1/8" Notched Izod Impact Strength, ft-lbs/in	25	ASTM D-256	✓ Chemical Resistant
•Tensile Yield Strength, psi	6000	ASTM D638	✓ NSF 51 Listed
•Coefficient of Thermal Expansion, in/in °F	3.6×10^{-5}	ASTM D-696	
•UL- Flame Rating	V-0	UL-94	

P/N	A	B	C	Length	Weight Lbs/Foot	Quantity Per Box
	Leg	Leg	Wall			
R1773	1/2"	1/2"	0.06	96.00"	0.034	25
R1679	3/4"	3/4"	0.06	96.00"	0.052	25
R677	3/4"	3/4"	0.10	96.00"	0.085	20
R1811	1.0"	1.0"	0.06	96.00"	0.071	20
R1066	1.0"	1.0"	0.10	96.00"	0.115	20
R1778	1 1/2"	1.0"	0.19	96.00"	0.266	12
R1852	1 1/2"	1 1/2"	0.065	96.00"	0.116	12
R1025	1 1/2"	1 1/2"	0.19	96.00"	0.321	12
R1294	1 9/16"	3 1/2"	0.08	96.00"	0.245	10
R1812	2"	2.0"	0.10	96.00"	0.242	10
R1208	2"	2.0"	0.19	96.00"	0.471	10

Single box quantities
can ship via UPS

